

Safety Padlocks & Lockout Padlocks

Key control, visible identification and dependable personal energy isolation

OVERVIEW

PROLOCKEY safety padlocks are designed for personal lockout/tagout procedures where clear ownership, controlled key access and reliable hazardous energy isolation are essential. The range supports maintenance, electrical service and industrial safety teams with highly visible lock bodies, key-retaining operation and multiple shackle configurations.

PRODUCT COVERAGE

- Lockout padlocks with steel, stainless steel, nylon and cable shackles
- Keyed different, keyed alike, master keyed and grand master key systems
- Long-body, compact, dustproof, pop-up and laminated padlock options
- Multiple colors, warning labels, laser marking and logo customization

TYPICAL APPLICATIONS

Suitable for machinery maintenance, electrical panels, production lines, utilities, chemical facilities, construction sites and other workplaces that require individual lock identification.

SELECTION & CUSTOMIZATION

Select the body style, shackle material, shackle height and key system according to the isolation point, environment and site key-control policy. Contact PROLOCKEY for project configuration and OEM requirements.

LOCK OUT. STAY SAFE.

www.lockeylockout.com | sales@lockeysafety.com

Product specifications are subject to confirmation at the time of order.

SAFETY PADLOCKS

- Different shackle materials and heights for your choice:



- Different body shapes for your choice:



- Different body colors for your choice:



SAFETY PADLOCKS

- Different shackle materials and heights for your choice:



- Different body shapes for your choice:



- Different body colors for your choice:



01

SAFETY PADLOCK

PADLOCK PROFILE CHART

Padlock Shackle:

- Steel Shackle: 25S, 38S, 76S
- Insulation Shackle: 25P, 38P, 76P, 38PD4
- Stainless Steel Shackle: 16SSD4, 38SS, 38SSD4
- Cable Shackle: C175D3.2, C175D1.5

Padlock Body:

- Straight edge plastic lock body: P
- Arc edge plastic lock body: AP
- Striped plastic lock body: BP
- Lockey patented design lock body: CP

With rewritable warning labels

Dangerous label:

The language can be customized.

Key Retaining Feature:

When the shackle is open, the key can not be removed.

Unique non-conductive lock cylinder:

The operation process is more secure by preventing electricity travelling from the shackle to the key.

● Features

- Reinforced nylon body, ensures the padlock strength and can't be deformed easily. The steel shackle padlock withstands temperature from -20°C to $+120^{\circ}\text{C}$. The non-conductive shackle padlock withstands temperature from -20°C to $+120^{\circ}\text{C}$.
- Widely used in chemical, electrical, automobile industry, etc.
- With rewritable warning signs, other designs can be customized.
- Resistance of chemical, extreme temperatures and UV rays.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving is available if required.
- Several types of lock bodies and different colors available.


OEM SERVICE SUPPORTED



Other languages and designs




● Regular Shackles

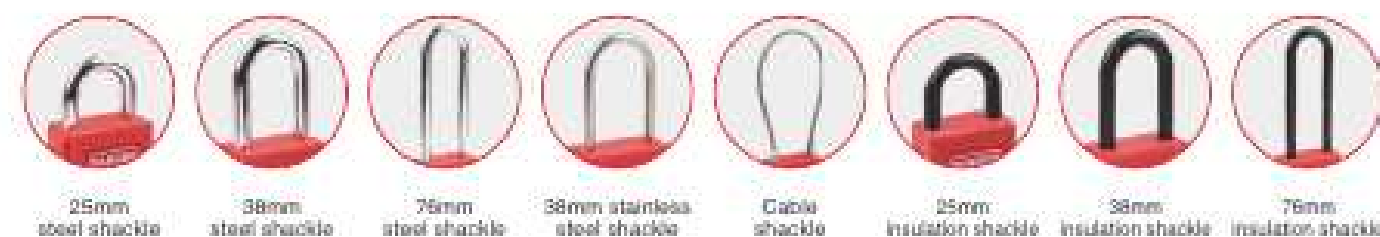

● Regular lock bodies



KEY CHARTING SYSTEM

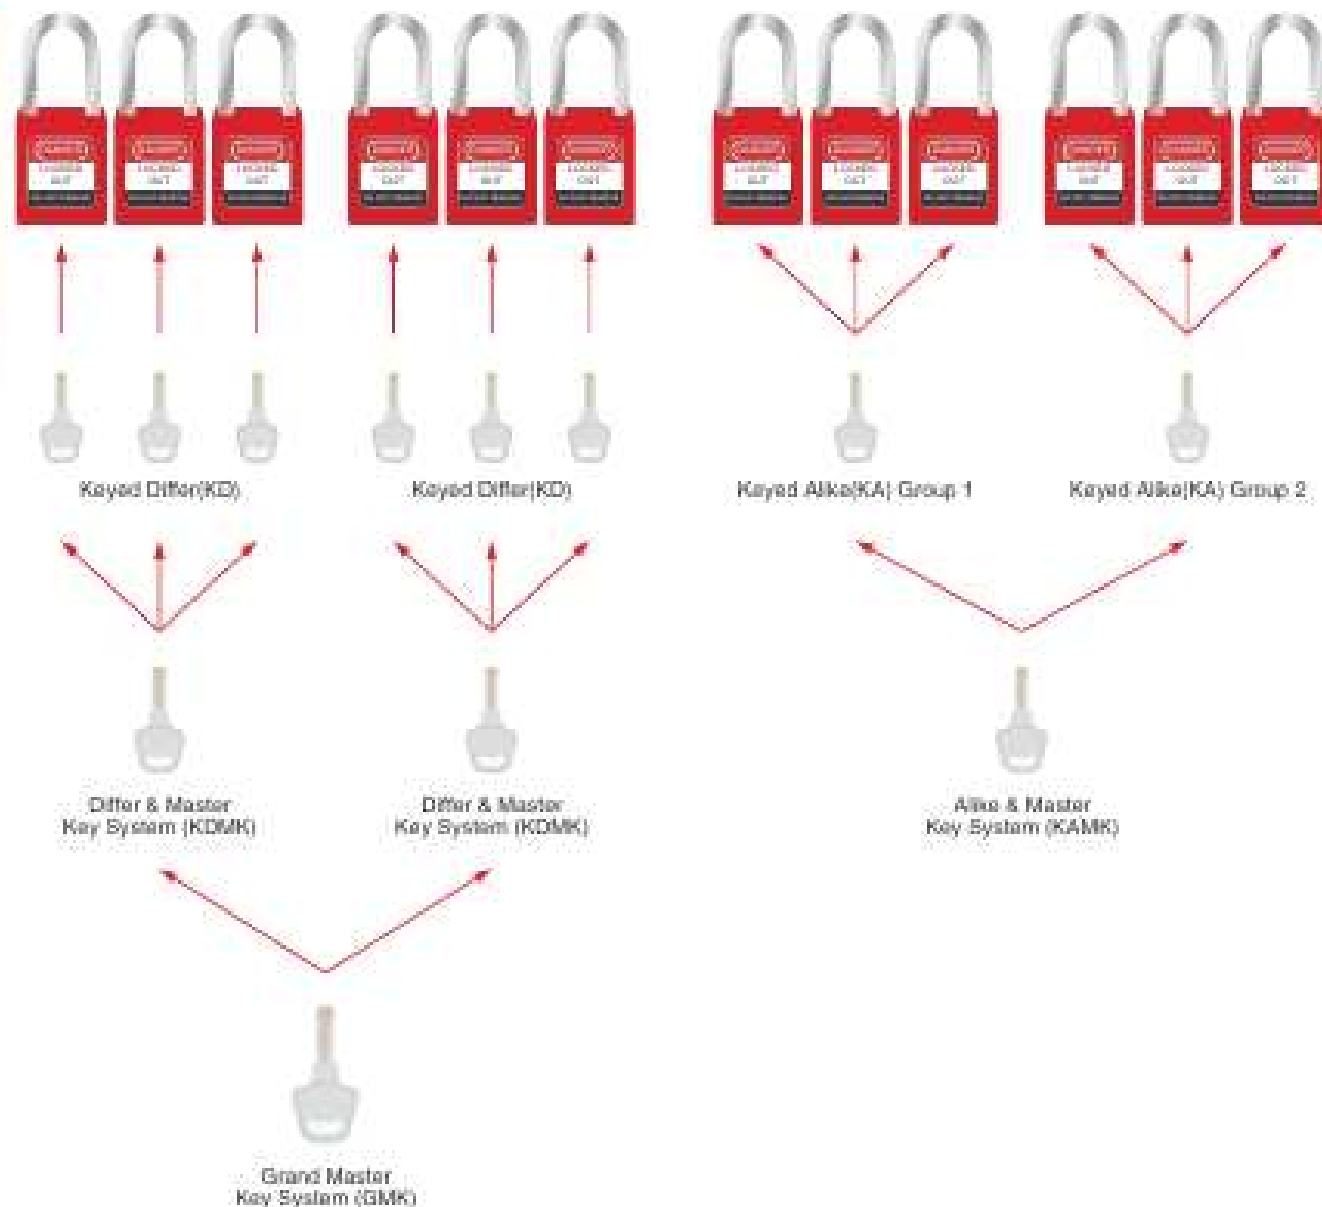

● Key Charting System

- Keyed Differ System (KD): Each padlock is keyed differently, supplied with 1 key per lock. 50000pcs individual locks available.
- Keyed Alike System (KA): Each padlock is keyed the same in one group. 1 key will open all padlocks in each group.
- Differ & Master Key System (KDMK): Each padlock is keyed differently, supplied with 1 key per lock. A master key will override and open any of these padlocks.
- Alike & Master Key System (KAMK): Each padlock is keyed the same in one group. A master key will override and open all groups of Alike keyed.
- Grand Master Key System (GMK): Each padlock is keyed different in one group. A grand master key will override and open all different KDMK groups.

● Key Charting Registration

It is important that each employee at a site has a unique padlock key to help prevent duplicate keys from jeopardizing your lockout program. We promise to use different key and numbering for each order if required. Besides each key can be recorded in our programming system so that you can reorder the same key whenever necessary.

SAFETY PADLOCK SHACKLE LENGTH: 38MM



- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.

Part No.	Description	Shackle Material	Specification
KA-P38S	Keyed Alike	Steel	"P": Straight edge plastic lock body
KD-P38S	Keyed Differ		"S": Steel shackle
MK-P38S	Master & Alike / Differ		"SS": Stainless steel shackle
GMK-P38S	Grand Master Key	Stainless Steel	"P": Nylon shackle
KA-P38SS	Keyed Alike		"A": Aluminum shackle
KD-P38SS	Keyed Differ		"B": Brass shackle
MK-P38SS	Master & Alike / Differ	Nylon	*1keylock
GMK-P38SS	Grand Master Key		
KA-P38P	Keyed Alike		
KD-P38P	Keyed Differ		
MK-P38P	Master & Alike / Differ		
GMK-P38P	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.

SAFETY PADLOCK SHACKLE LENGTH: 25MM



- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.

Normal color: ● RED, ● YLW, ● BLU, ● DBL, ● GRN, ● ORG, ● PRP, ● BRN, ● BLK, ● WHT, ● GRY
Other colors can be custom made.

SAFETY PADLOCK

SHACKLE LENGTH: 25MM/38MM/76MM



PP25S

PP38P

PP76S



Plastic cylinder

Iron key

Part No.	Shackle Material	Approx. A (mm)	Approx. B (mm)	Approx. C (mm)	Specification
PP25S	Steel	37	45.5	25	keyed differ, keyed alike, master keyed and grand master keyed supported.
PP38S		37	45.5	38	
PP76S		37	45.5	76	
PP25P	Nylon	37	45.5	25	*1keylock
PP38P		37	45.5	38	
PP76P		37	45.5	76	

- Brass free. Key cylinder is made of wholly plastic and iron key.
- Reinforced nylon body, withstand temperature from -20° °C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Laser printing and logo engraving available if required.
- All different colors available.

MINI SAFETY PADLOCK SHACKLE DIA: 4.2MM



Part No.	Description	Shackle Material	Specification
KA-PS25S	Keyed Alike	Steel	"P": Straight edge plastic lock body
KD-PS25S	Keyed Differ		"S": Steel shackle
MK-PS25S	Master & Alike / Differ		"A": Aluminum shackle
GMK-PS25S	Grand Master Key		"B": Brass shackle
KA-PS25P	Keyed Alike	Nylon	"SS": Stainless steel shackle
KD-PS25P	Keyed Differ		*1key/lock
MK-PS25P	Master & Alike / Differ		
GMK-PS25P	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.

Part No.	Description	Shackle Material	Specification	SAFETY PADLOCK SHACKLE DIA: 4MM	
KA-P38SSD4	Keyed Alike	Stainless Steel	"P": Straight edge plastic lock body "A": Aluminum shackle "B": Brass shackle "SS": Stainless steel shackle *1key/lock		P38SSD4
KD-P38SSD4	Keyed Differ				
MK-P38SSD4	Master & Alike / Differ				
GMK-P38SSD4	Grand Master Key				
KA-P38PD4	Keyed Alike	Nylon			P38PD4
KD-P38PD4	Keyed Differ				
MK-P38PD4	Master & Alike / Differ				
GMK-P38PD4	Grand Master Key				
KA-UP44SSD4	Keyed Alike	Stainless Steel			UP44SSD4
KD-UP44SSD4	Keyed Differ				
MK-UP44SSD4	Master & Alike / Differ				
GMK-UP44SSD4	Grand Master Key				

- Reinforced nylon body, withstand temperature from -20°C to +90°C. The stainless steel shackle is chrome plated, ensuring the strength and rust protection; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Laser printing and logo engraving available if required.
- All different colors available.

SAFETY PADLOCK SHACKLE DIA: 4MM



Part No.	Description	Shackle Material	Specification
KA-P16SSD4	Keyed Alike	Stainless Steel	"P": Straight edge plastic lock body "SS": Stainless steel shackle *1key/lock
KD-P16SSD4	Keyed Differ		
MK-P16SSD4	Master & Alike / Differ		
GMK-P16SSD4	Grand Master Key		
KA-P38SSD4-2	Keyed Alike		
KD-P38SSD4-2	Keyed Differ		
MK-P38SSD4-2	Master & Alike / Differ		
GMK-P38SSD4-2	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The stainless steel shackle is chrome plated, ensuring the strength and rust protection.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.

Normal color: RED, YLW, BLU, DBL, GRN, ORG, PRP, BRN, BLK, WHT, GRY
Other colors can be custom made.

DUSTPROOF SAFETY PADLOCK



Part No.	Description	Shackle Material	Specification
KA-P38SDP	Keyed Alike	Steel	"P": Straight edge plastic lock body "S": Steel shackle "A": Aluminum shackle "B": Brass shackle "SS": Stainless steel shackle *1key/lock
KD-P38SDP	Keyed Differ		
MK-P38SDP	Master & Alike / Differ		
GMK-P38SDP	Grand Master Key		
KA-P38PDP	Keyed Alike	Nylon	
KD-P38PDP	Keyed Differ		
MK-P38PDP	Master & Alike / Differ		
GMK-P38PDP	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Shackle Length: 25mm, 38mm, 76mm.
- Laser printing and logo engraving available if required.
- All different colors available.

Part No.	Description	Shackle Material	Specification	DUSTPROOF SILICA COVERED SAFETY PADLOCK
KA-P38SR1	Keyed Alike	Steel	"P": Straight edge plastic lock body "S": Steel shackle "A": Aluminum shackle "B": Brass shackle SS: Stainless steel shackle *1key/lock	
KD-P38SR1	Keyed Differ			
MK-P38SR1	Master & Alike / Differ			
GMK-P38SR1	Grand Master Key			
KA-P38PR1	Keyed Alike	Nylon		
KD-P38PR1	Keyed Differ			
MK-P38PR1	Master & Alike / Differ			
GMK-P38PR1	Grand Master Key			
R1	Silica cover only			



- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily. The cover is made of non-transparent silicone.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Shackle Length: 25mm, 38mm, 76mm.
- Laser printing and logo engraving available if required.
- Different types of lock bodies and all different colors available.

DUSTPROOF SILICA COVERED SAFETY PADLOCK



Part No.	Description	Shackle Material	Specification
KA-P38SR2	Keyed Alike	Steel	"P": Straight edge plastic lock body "S": Steel shackle "A": Aluminum shackle "B": Brass shackle "SS": Stainless steel shackle *1key/lock
KD-P38SR2	Keyed Differ		
MK-P38SR2	Master & Alike / Differ		
GMK-P38SR2	Grand Master Key		
KA-P38PR2	Keyed Alike	Nylon	
KD-P38PR2	Keyed Differ		
MK-P38PR2	Master & Alike / Differ		
GMK-P38PR2	Grand Master Key		
R2	Silica cover only		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily. The cover is made of translucent silicone.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Shackle Length: 25mm, 38mm, 76mm.
- Laser printing and logo engraving available if required.
- Different types of lock bodies and all different colors available.

Normal color: RED, YLW, BLU, DBL, GRN, ORG, PRP, BRN, BLK, WHT, GRY
Other colors can be custom made.

SAFETY PADLOCK CABLE SHACKLE



PC175D3.2 PC175D1.5

Part No.	Description	Shackle Material	Specification
KA-PC175D3.2	Keyed Alike	Stainless Steel Cable	*P*: Straight edge plastic lock body *1key/lock
KD-PC175D3.2	Keyed Differ		
MK-PC175D3.2	Master & Alike / Differ		
GMK-PC175D3.2	Grand Master Key		
KA-PC175D1.5	Keyed Alike	Stainless Steel Cable	
KD-PC175D1.5	Keyed Differ		
MK-PC175D1.5	Master & Alike / Differ		
GMK-PC175D1.5	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The cable shackle is made from stainless steel, ensuring the strength and can't be deformed easily.
- Other cable lengths can be customized.
- Laser printing and logo engraving available if required.

Part No.	Description	Shackle Material	Specification
KA-CP25SPU	Keyed Alike	Steel	*CP*: Lockey patented design lock body
KD-CP25SPU	Keyed Differ		*S*: Steel shackle
MK-CP25SPU	Keyed & Alike / Differ		*A*: Aluminum shackle
GMK-CP25SPU	Grand Master Key		*B*: Brass shackle
KA-CP25PPU	Keyed Alike	Nylon	*SS*: Stainless steel shackle
KD-CP25PPU	Keyed Differ		Other body shapes (P, AP, BP) also available.
MK-CP25PPU	Keyed & Alike / Differ		*1key/lock
GMK-CP25PPU	Grand Master Key		

POP-UP SAFETY PADLOCK DIA. 6MM, LENGTH 25MM



CP25SPU CP25PPU

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Durable brass cylinder, high strength, wear-resistant, anti-rust.
- Pop-Up Feature: The shackle will pop up automatically when unlocking. Press the shackle when locking, no key is needed to insert and pull out.
- Laser printing and logo engraving available if required.
- All different colors available.

POP-UP SAFETY PADLOCK DIA. 6MM, LENGTH 38MM



CP38SPU CP38PPU

Part No.	Description	Shackle Material	Specification
KA-CP38SPU	Keyed Alike	Steel	*CP*: Lockey patented design lock body
KD-CP38SPU	Keyed Differ		*S*: Steel shackle
MK-CP38SPU	Keyed & Alike / Differ		*A*: Aluminum shackle
GMK-CP38SPU	Grand Master Key		*B*: Brass shackle
KA-CP38PPU	Keyed Alike	Nylon	*SS*: Stainless steel shackle
KD-CP38PPU	Keyed Differ		Other body shapes (P, AP, BP) also available.
MK-CP38PPU	Keyed & Alike / Differ		*1key/lock
GMK-CP38PPU	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Zinc-alloy lock cylinder, wearproof, rust proof, hard to change shape, durable.
- Pop-Up Feature: The shackle will pop up automatically when unlocking. Press the shackle when locking, no key is needed to insert and pull out.
- Laser printing and logo engraving available if required.
- All different colors available.

Normal color: RED, YLW, BLU, DBL, GRN, ORG, PRP, BRN, BLK, WHT, GRY
Other colors can be custom made.

POP-UP SAFETY PADLOCK DIA. 6MM, LENGTH 76MM



CP76SPU CP76PPU

Part No.	Description	Shackle Material	Specification
KA-CP76SPU	Keyed Alike	Steel	*CP*: Lockey patented design lock body
KD-CP76SPU	Keyed Differ		*S*: Steel shackle
MK-CP76SPU	Keyed & Alike / Differ		*A*: Aluminum shackle
GMK-CP76SPU	Grand Master Key		*B*: Brass shackle
KA-CP76PPU	Keyed Alike	Nylon	*SS*: Stainless steel shackle
KD-CP76PPU	Keyed Differ		Other body shapes (P, AP, BP) also available.
MK-CP76PPU	Keyed & Alike / Differ		*1key/lock
GMK-CP76PPU	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Durable brass cylinder, high strength, wear-resistant, anti-rust.
- Pop-Up Feature: The shackle will pop up automatically when unlocking. Press the shackle when locking, no key is needed to insert and pull out.
- Laser printing and logo engraving available if required.
- All different colors available.

Part No.	Description	Shackle Material	Specification
KA-CP38SD4PU	Keyed Alike	Stainless Steel	*CP*: Lockey patented design lock body
KD-CP38SD4PU	Keyed Differ		*SS*: Stainless steel shackle
MK-CP38SD4PU	Master & Alike / Differ		*1key/lock
GMK-CP38SD4PU	Grand Master Key		

POP-UP SAFETY PADLOCK SHACKLE DIA: 4MM



CP38SD4PU

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The stainless steel shackle is chrome plated, ensuring the strength and rust protection; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Durable brass cylinder, high strength, wear-resistant, anti-rust.
- Pop-Up Feature: The shackle will pop up automatically when unlocking. Press the shackle when locking, no key is needed to insert and pull out.
- Laser printing and logo engraving available if required.
- All different colors available.

POP-UP SAFETY PADLOCK SHACKLE DIA: 4MM



CP38SD4PU CP38SD4PU-2

Part No.	Description	Shackle Material	Specification
KA-CP16SD4PU	Keyed Alike	Stainless Steel	*CP*: Lockey patented design lock body
KD-CP16SD4PU	Keyed Differ		*SS*: Stainless steel shackle
MK-CP16SD4PU	Master & Alike / Differ		Other body shapes (P, AP, BP) also available.
GMK-CP16SD4PU	Grand Master Key		*1key/lock
KA-CP38SD4PU-2	Keyed Alike		
KD-CP38SD4PU-2	Keyed Differ		
MK-CP38SD4PU-2	Master & Alike / Differ		
GMK-CP38SD4PU-2	Grand Master Key		

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The stainless steel shackle is chrome plated, ensuring the strength and rust protection.
- Durable brass cylinder, high strength, wear-resistant, anti-rust.
- Pop-Up Feature: The shackle will pop up automatically when unlocking. Press the shackle when locking, no key is needed to insert and pull out.
- Laser printing and logo engraving available if required.
- All different colors available.

Normal color: RED, YLW, BLU, DBL, GRN, ORG, PRP, BRN, BLK, WHT, GRY
Other colors can be custom made.

SAFETY PADLOCK



WCP38S

Part No.	Shackle Material	A(mm)	B(mm)	C(mm)	Specification
WCP25S	Steel	41	45	25	Support keyed alike, keyed differ, master keyed and grand master keyed system. *1key/lock
WCP38S		41	45	38	
WCP76S		41	45	76	
WCP25P	Nylon	41	45	25	
WCP38P		41	45	38	
WCP76P		41	45	76	

- Made of copper cylinder and key. More resistant to corrosion and rust. Very stable, with more than 1 million times operating.
- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.

Part No.	Shackle Material	A(mm)	B(mm)	C(mm)	Specification
WBP25S	Steel	41	45	25	Support keyed alike, keyed differ, master keyed and grand master keyed system. *1key/lock
WBP38S		41	45	38	
WBP76S		41	45	76	
WBP25P	Nylon	41	45	25	
WBP38P		41	45	38	
WBP76P		41	45	76	

SAFETY PADLOCK



WBP38S

- Made of copper cylinder and key. More resistant to corrosion and rust. Very stable, with more than 1 million times operating.
- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.

SAFETY PADLOCK



WDP40SD5 WDP40SR3

Part No.	Shackle Material	A(mm)	B(mm)	C(mm)	Specification
WDP40SD5	Steel	5	40	22	Support keyed alike, keyed differ, master keyed and grand master keyed system. *1key/lock
WDP40SR3	Steel with plastic coat	6.2	40	19	

- Made of copper cylinder&key with nylon body. More Resistant...
- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.

Normal color: ● RED, ● YLW, ● BLU, ● DBL, ● GRN, ● ORG, ● PRP, ● BRN, ● BLK, ● WHT, ● GRY
Other colors can be custom made.

Part No.	Shackle Material	A(mm)	B(mm)	C(mm)	Specification
CPL25S	Steel	37	75	25	Support keyed alike, keyed differ, master keyed and grand master keyed system. *1key/lock
CPL38S		37	75	38	
CPL76S		37	75	76	
CPL25P	Nylon	37	75	25	
CPL38P		37	75	38	
CPL76P		37	75	76	

SAFETY PADLOCK WITH LONG BODY



CPL38S

CPL38P

- Reinforced nylon body, withstand temperature from -20°C to +120°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.
- All different colors available.

Economic Safety Padlock SHACKLE LENGTH: 25MM/38MM/76MM



UP25S

UP38P

UP76S


Part No.	Shackle Material	A(mm)	B(mm)	C(mm)	Specification
UP25S	Steel	39	45	25	keyed differ, keyed alike, master keyed and grand master keyed supported.
UP38S		39	45	38	
UP76S		39	45	76	
UP25P	Nylon	39	45	25	
UP38P		39	45	38	
UP76P		39	45	76	

- Industrial ABS body with nylon shackle, withstand temperature from -20°C to +90°C. The steel shackle is chrome plated; the non-conductive shackle is made from nylon, withstand temperature from -20°C to +120°C, ensuring the strength and deformation fracture not easily.
- Key Retaining Feature: When the shackle is open, the key can't be removed.
- Laser printing and logo engraving available if required.

Part No.	Specification	Description
ALP25S	Inner shackle: 25mm; diameter: 6mm	Support keyed differ, keyed alike, master keyed, and grand master keyed system.
ALP38S	Inner shackle: 38mm; diameter: 6mm	
ALP76S	Inner shackle: 76mm; diameter: 6mm	

ALUMINUM SAFETY PADLOCK

- Aluminum body and triple-coated hardened chrome plated steel shackle.
- When unlocking the padlock, the shackle will pop up automatically.
- Shackle Length: 25mm, 38mm, 76mm.
- Normal color: RED, YLW, BLU, ORG, GRN, PRP, BLK, SLV.
- Other shackle lengths can be customized.

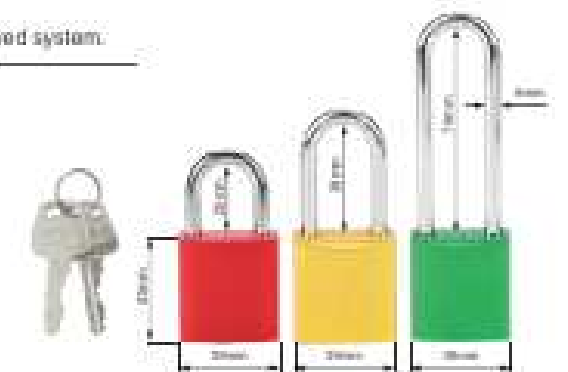

ALP25S

ALP38S

ALP76S

BRASS PADLOCK WITH STEEL SHACKLE



Part No.	Description	A(mm)	B(mm)	C(mm)	D(mm)
BRP25S	KA, KD	22	6	32.6	39.6
BRP60S		63	6	32.6	39.6

- Solid brass body and hardened chrome plated steel shackle, strong corrosion resistance.
- With durable brass cylinder, anti-cutting and anti-sawing. Each padlock is equipped with 2 keys.
- Lock body size: 30mm, 40mm, 50mm, 60mm, 70mm. Other sizes can be customized.
- Other shackle lengths can be customized.

Part No.	Description	A(mm)	B(mm)	C(mm)	D(mm)
LP01	KA, KD	23	6	35	40
LP02		38	6	35	40
LP05		63	6	35	40

- Made from hardened steel with more durable brass cylinder, anti-cutting and anti-sawing.
- With a plastic cover in the bottom, normally is blue. Other colors available.
- Keyed different. Keyed alike available.
- Other lock width and shackle length also available.

LAMINATED SAFETY PADLOCK



LAMINATED SAFETY PADLOCK



Part No.	Description	A(mm)	B(mm)	C(mm)	D(mm)
LPC01	KA, KD	27	7.8	41	48
LPC02		42	7.8	41	48

- Shackle made from hardened steel with PVC cover, anti-cutting and anti-sawing.
- Durable brass cylinder, high strength, high accuracy, anti-rust.
- A cap to cover the key hole, water proof and dust proof.
- Different colors and shackles available.