

Valve Lockout Devices

Mechanical isolation solutions for common industrial valve types and operating conditions

OVERVIEW

PROLOCKEY valve lockout devices help prevent unauthorized or accidental operation of valves during inspection, repair and maintenance. The catalog covers purpose-built and adjustable designs for isolating hazardous fluids, steam, gas and process media across a wide range of handle shapes and valve sizes.

PRODUCT COVERAGE

- Gate valve lockouts, ball valve lockouts and butterfly valve lockouts
- Universal, adjustable and handle-off valve lockout devices
- Plug valve, diaphragm valve and specialized process-valve solutions
- Durable industrial materials with highly visible lockout identification

TYPICAL APPLICATIONS

Used in chemical processing, oil and gas, water treatment, food and pharmaceutical production, power generation, manufacturing and facility maintenance.

SELECTION & CUSTOMIZATION

Match the device to the valve type, handle dimensions, operating position and available attachment points. Confirm the required padlock shackle diameter and environmental resistance before ordering.

LOCK OUT. STAY SAFE.

www.lockeylockout.com | sales@lockeysafety.com

Product specifications are subject to confirmation at the time of order.


www.lockeylockout.com




VALVE LOCKOUT

Locking safe

ADJUSTABLE BALL VALVE LOCKOUT

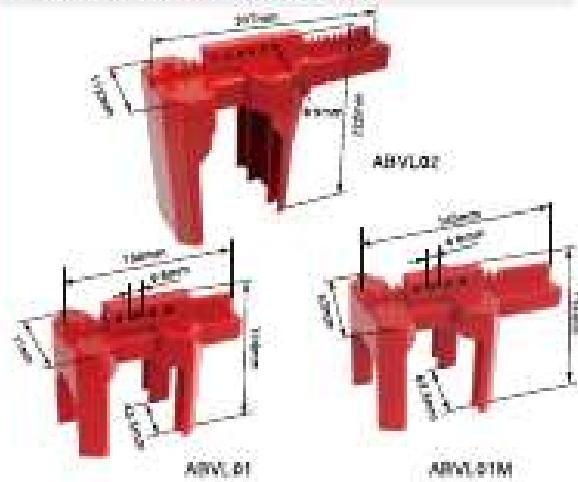


Part No.	Description
ABVL01	Suitable for pipes 1/2" to 2.5" in diameter, OPEN on pipes from 1/2" to 1.25"
ABVL01M	Suitable for pipes 1/2" to 3.15" in diameter, OPEN on pipes from 1/2" to 2.5"
ABVL02	Suitable for pipes 2" to 8" in diameter

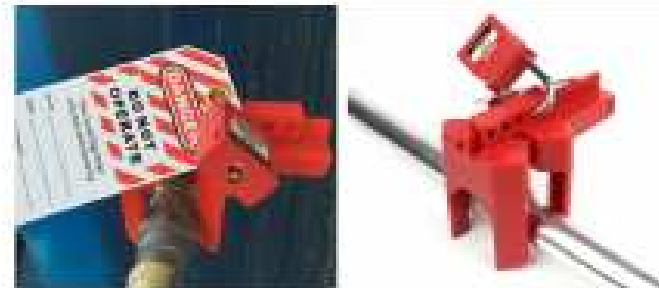


- Made from durable ABS, withstand temperature from -20°C to +60°C, highly resistant of cracking and abrasion and supports extreme weather temperature conditions.
- The two halves of the lockout encompass the ball valve handle to secure it from inadvertent activation of the valve handle.

Part No.	Description
ABVL03	Suitable for pipes diameter from 9.5mm (3/8") to 31mm (1 1/8")
ABVL03F	Suitable for pipes diameter from 9.5mm (3/8") to 31mm (1 1/8"), with front and back foot board
ABVL04	Suitable for pipes diameter from 13mm (1/2") to 70mm (2 3/4")
ABVL04F	Suitable for pipes diameter from 13mm (1/2") to 70mm (2 3/4"), with front and back foot board
ABVL05	Suitable for pipes diameter from 73mm (2 45") to 215mm (8 1/2")

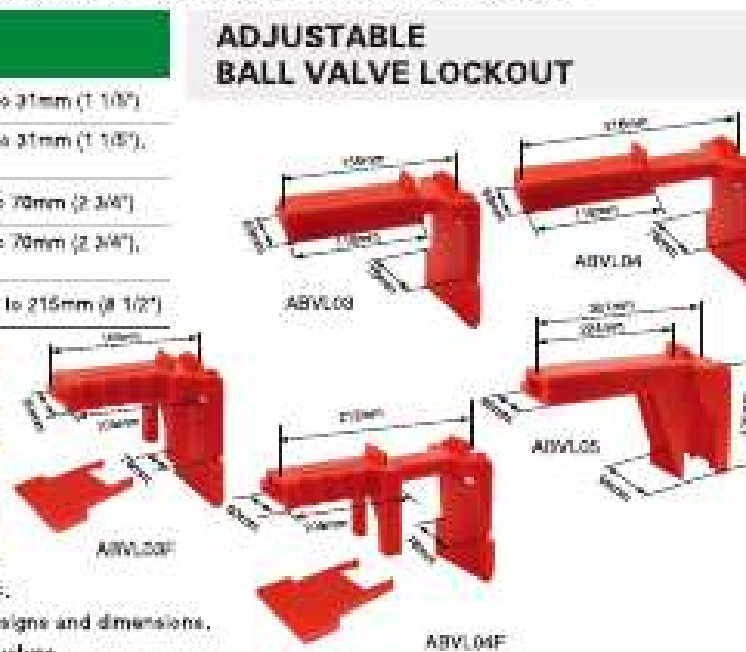

- Made from ABS, withstand temperature from -20°C to +60°C.
- Removable insert accommodates a wide range of handle designs and dimensions.
- It has an auxiliary rear plate, which can lock out double roll valves.

UNIVERSAL BALL VALVE LOCKOUT

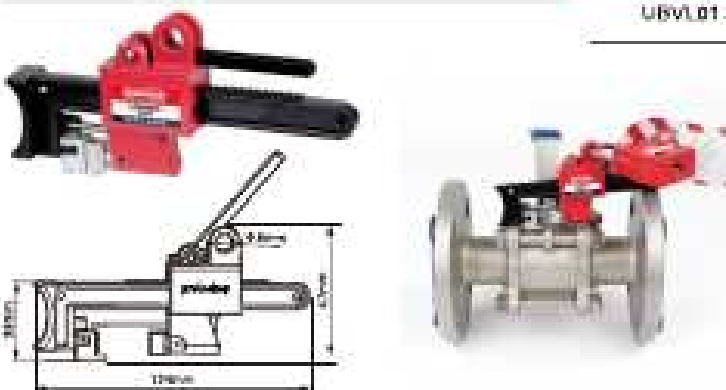

Part No.	Description
UBVL01	Suitable for valve diameters 6mm(1/4") to 101mm(4") and works on insulated pipes and in close quarters


- Made from zinc alloy, surface treatment by high temperature spraying, rust proof.
- Designed to lock out different types of ball valve, clamp tight on handle stop to prevent handle movement.
- Device encloses the valve stem, with the handle removed, to make accidental reactivation virtually impossible.
- Accept up to 1 padlock, locking shackle max diameter 8mm.
- Can be equipped together with hasps for multiple lockout usage.

HANDLE-OFF BALL VALVE LOCKOUT




- Made from PC, PU and PVC.
- Easy to carry and operate, use the belt to fix the lockout bag.
- Fine tailoring, smooth surface, excellent workmanship.
- Fits virtually all types of pipe including insulated, PVC and metal.
- Most 4pcs padlocks can lock on at the same time, Suitable for multiple people or work groups.

Part No.	Description
SBVL01	Suitable for valve handle from 6.35mm (1/4") to 25mm (1")
SBVL02	Suitable for valve handle from 31mm (1-1/4") to 76mm (3")
SBVL02-2	Suitable for valve handle from 31mm (1-1/4") to 76mm (3")

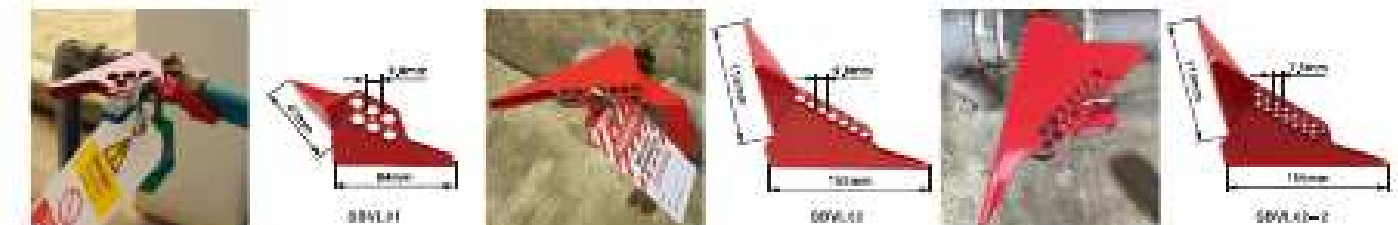

- Made from hardened steel, surface treatment by high temperature spraying, rust proof.
- The single-piece design locks can quarter-turn ball valves in off position.



ADJUSTABLE FLANGED BALL VALVE LOCKOUT

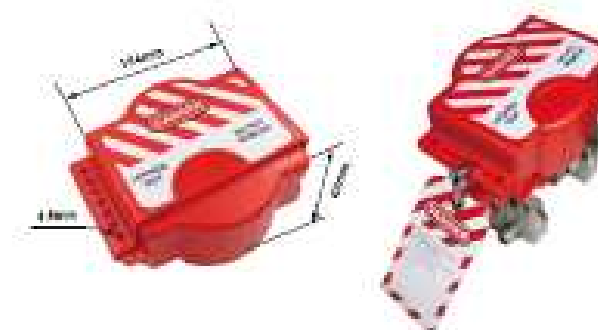

Part No.	Description
FBVL01	Suitable for 6.35mm(1/4") to 140mm(5") flanged ball valves

- Made from durable ABS, withstand temperature from -20°C to +60°C.
- Accept up to 1 padlock, locking shackle max diameter 8mm.
- Available in red color, other colors can be customized, providing English tags.

STANDARD GATE VALVE LOCKOUT

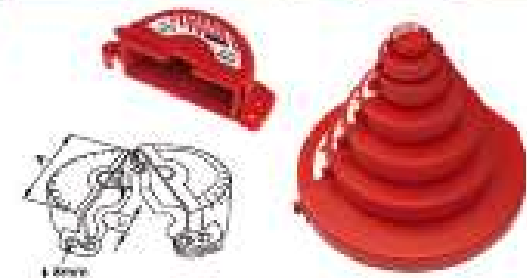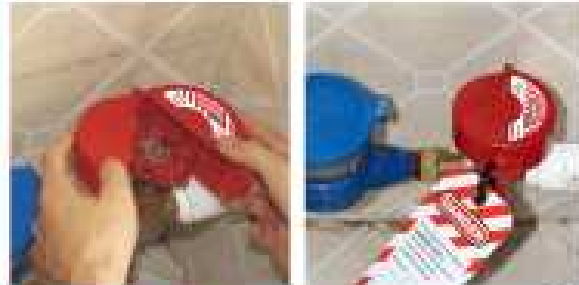

- Made from durable ABS, withstand temperature from -20°C to $+90^{\circ}\text{C}$, metal free.
- Once locked, it covers wholly around the hand wheel and prevent the valve wheel from being turned.
- Two parts design can be combined into one when storing and carrying which reduce the half restore space.
- Accept up to 2-4 padlocks, locking shackle max diameter 8mm.
- Available in 7 sizes and red color, other colors can be customized, providing English tag.


Part No.	Description	A	B	C
SGVL01	Suitable for valve handle 1" to 2 1/2" in diameter	80	30	20
SGVL01-H40	Suitable for valve handle 1" to 2 1/2" in diameter	80	30	40
SGVL02	Suitable for valve handle 2 1/2" to 5" in diameter	142	37	45
SGVL03	Suitable for valve handle 5" to 6 1/2" in diameter	184	44	63
SGVL04	Suitable for valve handle 6 1/2" to 10" in diameter	280	67	89
SGVL05	Suitable for valve handle 10" to 13" in diameter	364	67	105

- Made from durable ABS, withstand temperature from -20°C to $+90^{\circ}\text{C}$.
- Once locked, it covers around the hand wheel and prevent the valve wheel from being turned.
- Accept up to 1 padlock, locking shackle max diameter 9.8mm.
- Available in 5 sizes and red color, other colors can be customized, providing English tag.
- Transparent one can be customized with PC.
- Part no.: SGVL01-TR ~ SGVL05-TR.

STANDARD GATE VALVE LOCKOUT




ADJUSTABLE GATE VALVE LOCKOUT

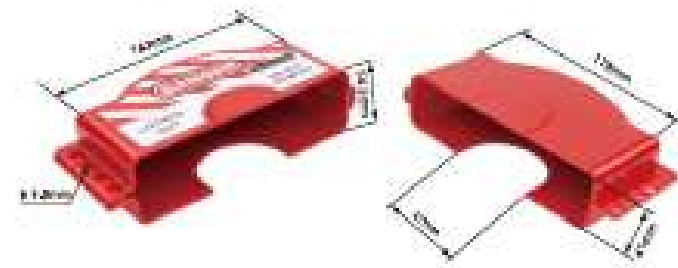

- Made from durable ABS, withstand temperature from -20°C to $+90^{\circ}\text{C}$.
- Can be equipped together with padlocks. Padlock locking shackle max diameter 3/8"(9.8mm).
- Can be covered and rotated freely around valve wheel, and adjustable to fit a range of valve handles.

Part No.	Description
AGVL01	Suitable for valve handle 1" to 6 1/2" in diameter

BUTTERFLY VALVE LOCKOUT

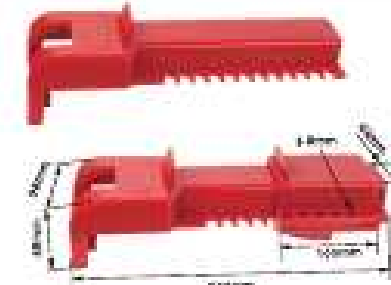

- Made from ABS, withstand temperature from -20°C to $+90^{\circ}\text{C}$.
- Good chemical property, resistant to oil stains and chemical product corrosion.
- Can be covered and rotated freely around valve wheels and adjustable to fit all ranges of valve handles.


Part No.	Description
BVL11	Adjustable angle :15° ~ 36°



- Locks out valve in seconds by feeding CSB1 cable lockout device through desired oryset and around valve neck.
- Made from nylon PA.Durable, lightweight thermoplastic material is chemical resistant and performs effectively in extreme environments.
- Directional application arrows allow for ease of installation and minimize user error.
- Stainless steel rivet allows device to smoothly pivot open and closed to ensure proper fit.

BUTTERFLY VALVE LOCKOUT


- Made of durable ABS plastic.
- Exclusive, anti-pivot lockout device fits the full range of pull handle valve sizes, from 1/4 in. to 8 in. diameter.
- A convenient, one-piece design that stays together whether in use or in storage.
- Holds up to three worker padlocks.
- Effective for all popular pull handle valves commonly used in food and beverage, water utilities, chemical, pharmaceutical and many other industries.
- Secures the valve handle in any desired position, from fully closed, to partially or fully open.

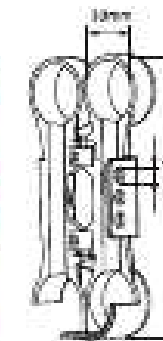

Part No.	Description
BVL31	Hole diameter: 8mm




BUTTERFLY VALVE LOCKOUT

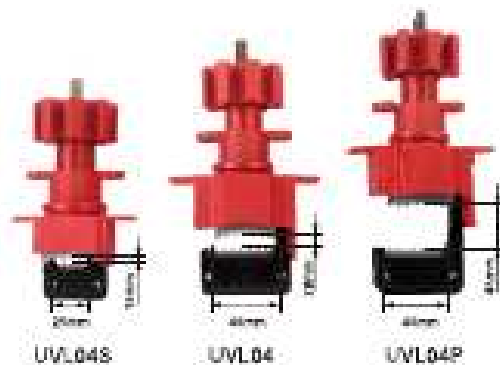

Part No.	Description
UVL04S	Max handle width 15mm
UVL04	Max handle width 28mm
UVL04P	Max handle width 45mm

- Made from industrial grade steel and nylon, withstand temperature from -20°C to $+120^{\circ}\text{C}$.
- Enable to lock out different types of butterfly valve with the base clamp.
- No other device offers such flexibility and security.
- Designed to handle extra impact and resist chemicals making them ideal for just about any environment.
- Can be matched with different fittings to make a series of universal valves.

BLOCKING ARM

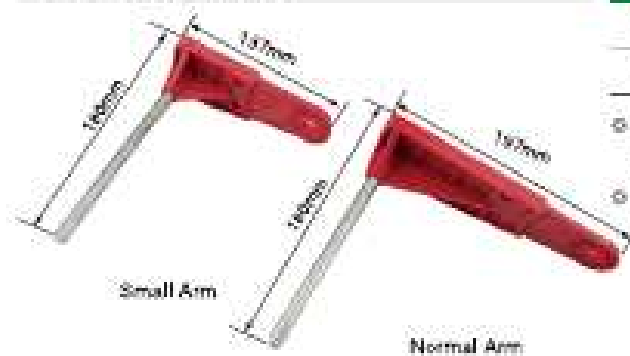

Part No.	Description
Small Arm	Size: 180mm(L)
Normal Arm	Size: 180mm(L)


- Made from industrial grade steel and nylon, withstand temperature from -20°C to $+120^{\circ}\text{C}$.
- Used with universal valve lockout base.

Part No.	Description
VSBL03-2	Hole diameter: 32mm, 46mm
VSBL03-3	Hole diameter: 24.4mm




- Made of transparent PC, withstand temperature from -20°C to $+120^{\circ}\text{C}$.
- Once locked, prevent the valve from being turned.
- The base allows use with two semicircles to accommodate valve.
- Accommodates valve up to 55mm diameter and 43mm tall.
- Fits 24.4mm and 32mm-46mm diameter valve.

DIAPHRAGM VALVE LOCKOUT

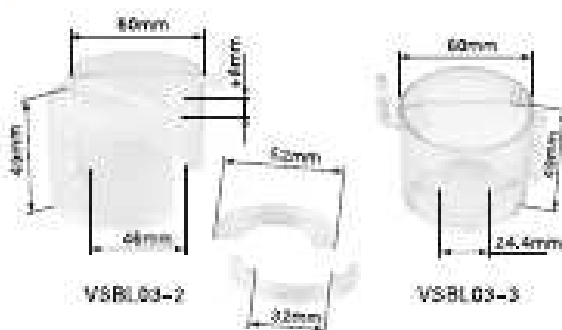

VALVE LOCKOUT

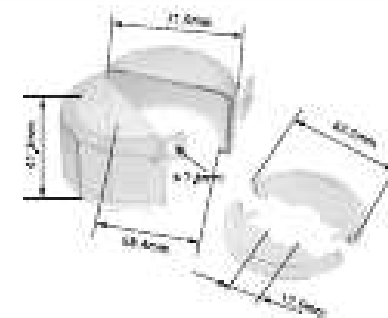


Part No.	Description
VSBL04-S	Hole diameter: 7.8mm



- Made of transparent PC, withstand temperature from -20°C to $+120^{\circ}\text{C}$.
- Prevent the valve handles from being turned when locked out.
- Using the two semicircles to accommodate double lock valves.
- Accommodates buttons up to 41mm tall.

VALVE LOCKOUT

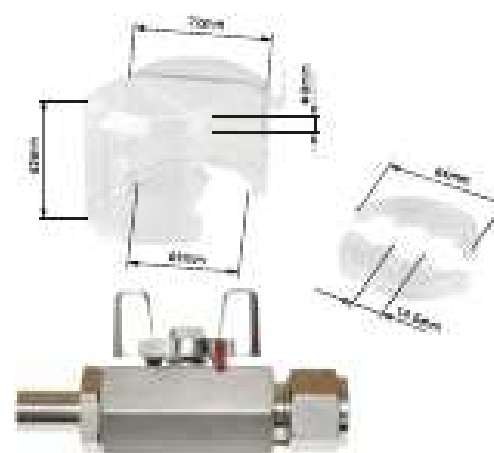

Part No.	Description
VSBL04	Hole diameter: 8mm




- Made of transparent PC, withstand temperature from -20°C to $+120^{\circ}\text{C}$.
- Prevent the valve handles from being turned when locked out.
- Using the two semicircles to accommodate double lock valves.
- Accommodates buttons up to 60mm tall.

DIAPHRAGM VALVE LOCKOUT



Part No.	Description
VSBL11	Hole diameter: 31.9mm x 31.3mm
VSBL12	Hole diameter: 40mm x 40mm

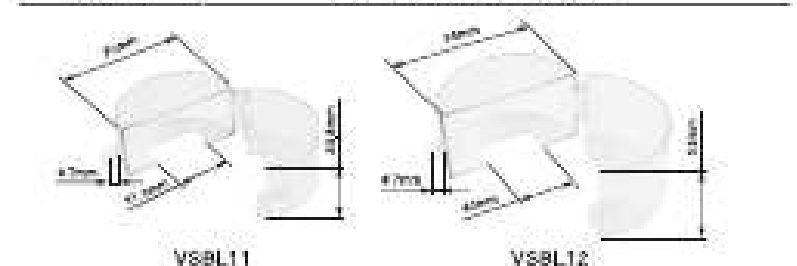

- Made of transparent PC, withstand temperature from -20°C to $+120^{\circ}\text{C}$.
- Prevent the valve handles from being turned when locked out.
- Buckle directly to lock.
- VSBL11 can accommodate inner valve up to 65mm diameter and 29mm tall. VSBL12 can accommodate inner valve up to 89mm diameter and 49mm tall.
- VSBL11 can accommodate outer valve up to 70mm diameter and 33.6mm tall. VSBL12 can accommodate outer valve up to 94mm diameter and 53mm tall.

Part No.	(A) Hole diameter
VSDL21-2	32mm
VSDL21-3	24,5mm

- Made of transparent PC, withstand temperature from -20°C to $+120^{\circ}\text{C}$.
- Once locked, prevent the valve from being turned.
- The base allows use with two semicircles to accommodate valve.
- Fits 24,5mm and 32mm-46mm diameter valve.



DIAPHRAGM VALVE LOCKOUT

